


Semantic Modeling

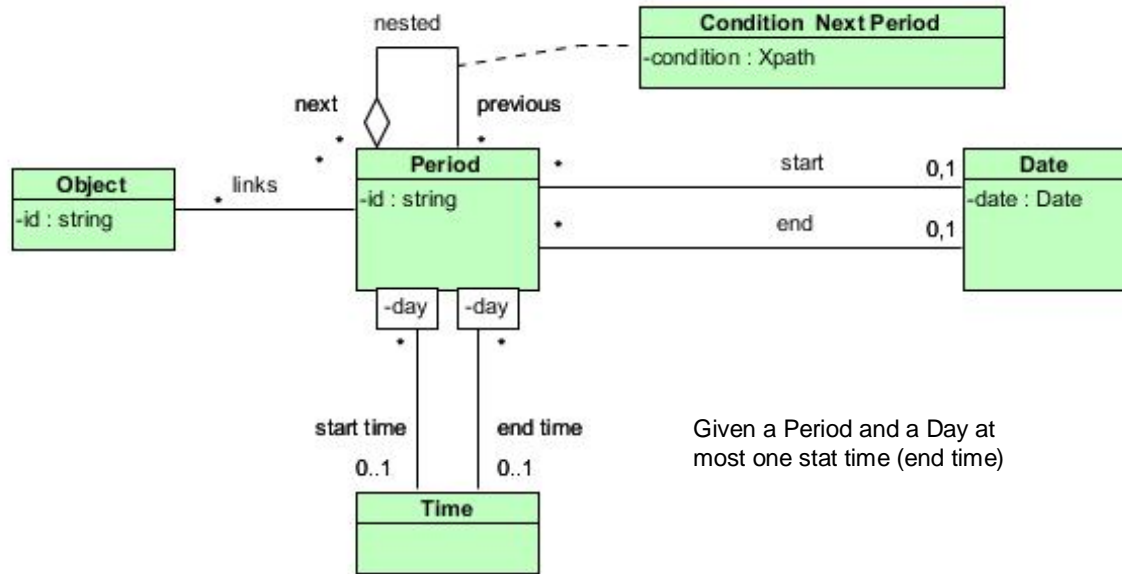

Given a Period and a Day at most one start time (end time)

- Examples of a Period id=P1
 - start date=01/01/2010
 - end date=20/01/2010
 - monday start time=8:00 AM
 - monday end time=5:00 PM
 - tuesday start time=8:30 AM
 - tuesday end time=4:00 PM
 - ../..
 - next period=P2
 - previous period=null
 - condition=no overlap between P1 and P2

Logical Modeling

